

Product Data Sheet





Supplied Nationwide by Building Plastics Online Ltd

Perform Panels are constructed with a hardwood waterproof plywood core bonded under controlled conditions with a high pressure decorative laminate to face, and a plain balancing laminate to rear. Waterproof gluelines are D4 rated.

All work is carried out to BS EN ISO 9001:2008 or client's specifications.

Perform Panels Nu-lock joints

Our standard details for jointing two panels together, without using aluminium extrusions, is nu-lock. This produces a watertight, subtle joint that is quick and easy to install.

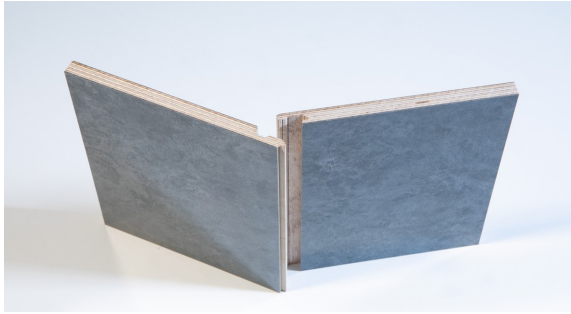


Size/Weight

2400 x 1200 x 11mm / Approx - 24KG

2400 x 900 x 11mm / Approx - 18KG

2400 x 600 x 11mm / Approx - 12KG

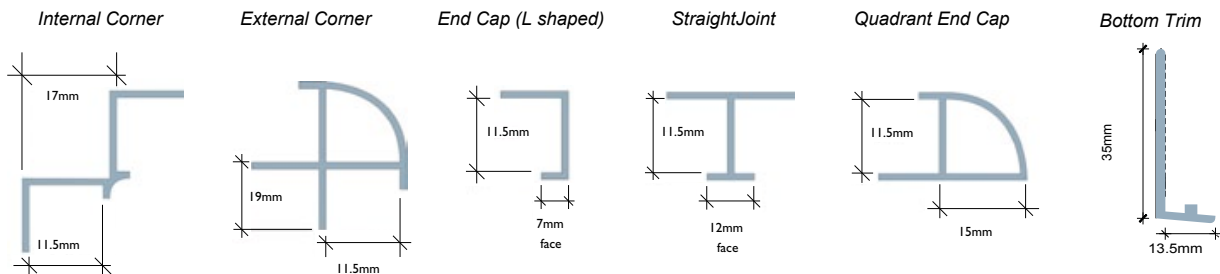

Metal sections are available in Satin Anodised Silver, White, Black and Polished Aluminium finishes.

Bottom Trim is only available in Satin Anodised Silver.

Perform Panel PanSeal is a 2 part sealing kit for shower trays & baths

Cleaning

The panels should be cleaned using warm water and a non abrasive mild detergent (not bleach). Scouring products or powders should not be used.

Precautions

When cutting or trimming the boards sharp edges may be encountered which should be smoothed off using sandpaper or plane. Aluminium cutting should be carried out using appropriate metal cutting tools such as a hack saw and de-burred. Appropriate eye protection should always be worn. When disposed of, the panels are suitable for landfill with no leaching or environmental pollution considerations associated with the product.

Thermal Properties

- **Dry Heat** For short periods, Perform Panel will withstand surface temperatures of up to 180°C (356°F) to Grade 5 without deterioration of surface or colour (*although in some cases a slight loss of sheen may occur*). Avoid continuous localised heat. If used in situations of localised heat, such as adjacent to ovens, the maximum temperature to which the panel should be subjected to for long periods (*up to 8 hours*) is 100°C. In applications, such as use in fire surrounds, panels are subjected to direct heat more or less continuously. In such cases we would not recommend the use of Perform Panel.
- **Resistance to Cigarette Burns** Perform Panel has a resistance rating of 4 (*Min 3*) to damage by lit cigarettes, and will normally only suffer a loss of sheen and/or slight to moderate brown staining. Excessive localised heating can result in blistering of laminate surface.
- **Resistance to Boiling Water** Being resistant to steam and boiling water, Perform Panel is ideal for applications where cleanliness and hygiene are important.
- **Resistance to Cold** Perform Panel is unaffected by extreme dry cold and cold storage conditions.
- **Chemical Resistance** Perform Panel has been used widely and satisfactorily for many years in medical and industrial sites. Perform Panel meets the requirements of EN 438 at level 5, which specifies resistance to staining by 49 substances in every day use.
- **Wear Resistance** 450 revolutions.